

A STURD **ECOLOGICAL INDUSTRIAL ROASTER**, WITH REINFORCED STRUCTURE AND SMART AUTOMATION. IT DELIVERS HIGH PRODUCTIVITY AND FINE PRECISION. IT IS OFFERED AS A STAND ALONE ROASTER OR AS PART OF AN INTERCONNECTED LINE WITH RECEPTION, STORAGE, CONVEYANCE, GRINDING AND PACKAGING

AVAILABLE FOR VOLUMES OF UP TO 480 KG PER BATCH

TOSTADOR INDUSTRIAL ECOLÓGICO
ROBUSTO, CON ESTRUCTURA REFORZADA E INTELIGENCIA EN LA AUTOMATIZACIÓN, CON ALTA PRODUCTIVIDAD Y PRECISIÓN, SISTEMAS DE INTERCONEXIÓN CON LAS ETAPAS DE MOLIENDA, ALMACENAJE, TRANSPORTE Y EMPAQUE

DISPONIBLE PARA VOLÚMENES HASTA 480 KG / LOTE




SUPERATTO®



CARMOMAQ®
Exceptional Roasters



**SUPERATTO®**

SUPERATTO is an industrial roaster that is able to handle long working hours. Its reinforced structure and smart automation allow high productivity and fine precision in roasting.


SUPERATTO is equipped with an ecological system, in which the smoke and coffee chaff released during the roasting process are incinerated by a modulating burner. It is the ideal setup for large industries and industrial lines in urban areas. Carmomaq also designs and supplies the complete roasting line integrated with the SUPERATTO: reception, storage, conveyance, grinding and packaging. Automation solutions are also available.

SUPERATTO is available in capacities of 30, 60, 120, 240 and 480 kg per batch. Their heat exchangers are fired by gas/diesel burners, wood or both.

SUPERATTO es un tostador con características industriales, robusto, perfecto para trabajar largas jornadas. Se destaca por su estructura reforzada y automatización inteligente, lo que permite una alta productividad y precisión en los procesos de tueste.

SUPERATTO cuenta con un sistema ecológico, donde los gases y películas generados a lo largo del proceso de tuesta son incinerados a través de un quemador modulante, haciéndolo ideal para grandes industrias y entornos urbanos. Junto al tostador, es posible conectar una línea de producción donde los pasos de molienda, almacenaje, transporte y empaque sean todos mecanizados ou con la opción totalmente automatizada.

Disponible en versiones de 30, 60, 120, 240 y 480 kg por lote, ofreciendo como opción hornos a leña (a partir de 60 kg), a gas, sistema flex (leña y gas) o diésel.

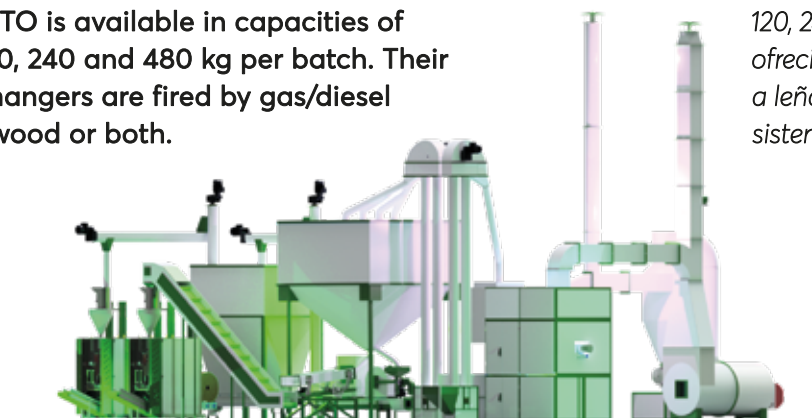

FEATURES / CARACTERÍSTICAS

**CAPACITY /
CAPACIDAD**

Capacities
of 30, 60,
120, 240
and 480 kg
per batch /

30, 60, 120,
240 y 480 kg
por lote

**ROASTING
TIME /
TIEMPO DE
TOSTIÓN**

12 to 20
minutes /
12 a 20
minutos

**CONTROL PANEL /
PANEL DE CONTROL**

Touchscreen panel
with automatic
controls of
temperature, drum
speed and flow of air /

Con display "Touch
Screen" de control digital
automático
de temperatura

**ROASTING
SOFTWARE /
SOFTWARE
DE TUESTE**

Compatible
with
roasting
software /

Compatible
con varios
softwares de
tueste

**FINISHING /
ACABADO**

Stainless
steel and
electrostatic
coating /

En acero
inoxidable y
pintura
electrostática

**GAS
TYPE /
TIPOS
DE GAS**

Natural
gas, liquid
propane
or wood /

Gas
natural,
propano
líquido o
leña

**POWER
REQUIREMENT /
POTENCIA
REQUERIDA**

18 up to 50 HP /
18 hasta 50 Hp